





ANALOG MULTIPLEXER/DEMULTIPLEXER

4067-SINGLE 16-CHANNEL 4097-DIFFERENTIAL 8-CHANNEL

- LOW ON RESISTANCE: 125Ω (typ.) OVER 15 V_{p-p} SIGNAL INPUT RANGE FOR V_{DD} - V_{SS} = 15V
- HIGH OFF RESISTANCE: CHANNEL LEAKAGE OF ±10pA (typ.) @ V_{DD} - V_{SS} = 10V
- MATCHED SWITCH CHARACTERISTICS: ΔR_{ON} = 5Ω (typ.) FOR V_{DD} - V_{SS} = 15V
- VERY LOW QUIESCENT POWER DISSIPATION UNDER A DIGITAL CONTROL INPUT AND SUPPLY CONDITIONS: 0.2μW (typ.) @ V_{DD} - V_{SS} = 10V
- BINARY ADDRESS DECODING ON CHIP
- QUIESCENT CURRENT SPECIFIED TO 20V FOR HCC DEVICE
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD No 13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B-SERIE CMOS DEVICES"



PIN CONNECTIONS

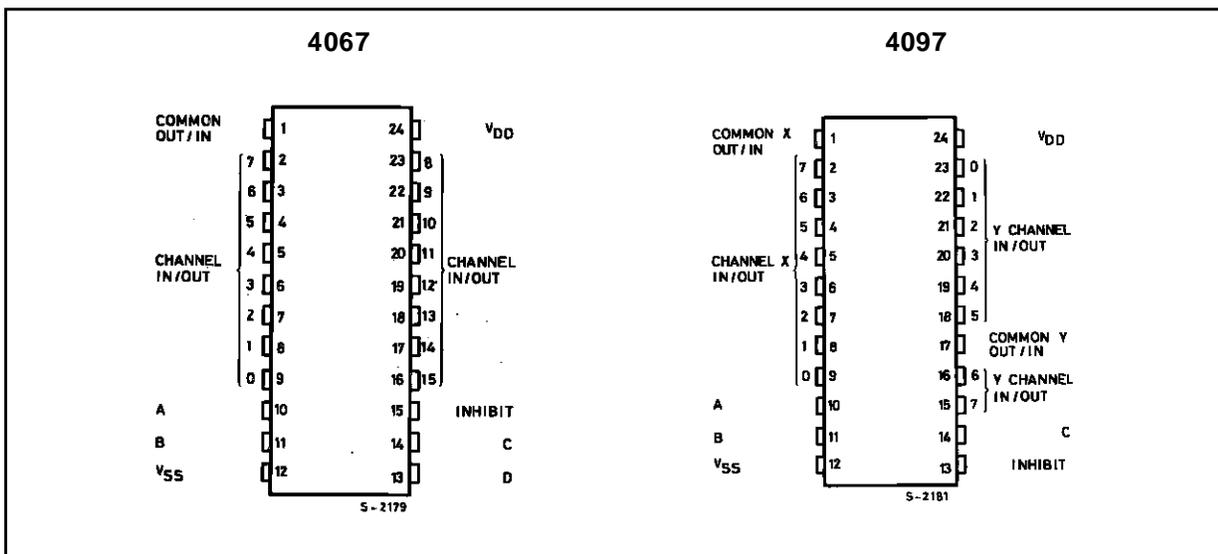

DESCRIPTION

The **CC4067** ,**CC4097** (extended temperature range) and **CC4067** , **CC4097** (intermediate temperature range) are monolithic integrated circuits available in 24-lead dual in line plastic or ceramic package.


The **CC4067** and **CC4097** COS/MOS analog multiplexers/demultiplexers are digitally controlled analog switches having low ON impedance, low OFF leakage current and internal

address decoding. in addition, the ON resistance is relatively constant over the full input-signal range.


The **CC4067** ia a 16-channel multiplexer with four binary control inputs A, B, C, D, and an inhibit input, arranged so that any combination of the inputs selects one switch.

The **CC4097** is a differential 8-channel multiplexer having three binary control inputs A, B, C, and an inhibit input. The inputs permit selection of one


FUNCTIONAL DIAGRAM

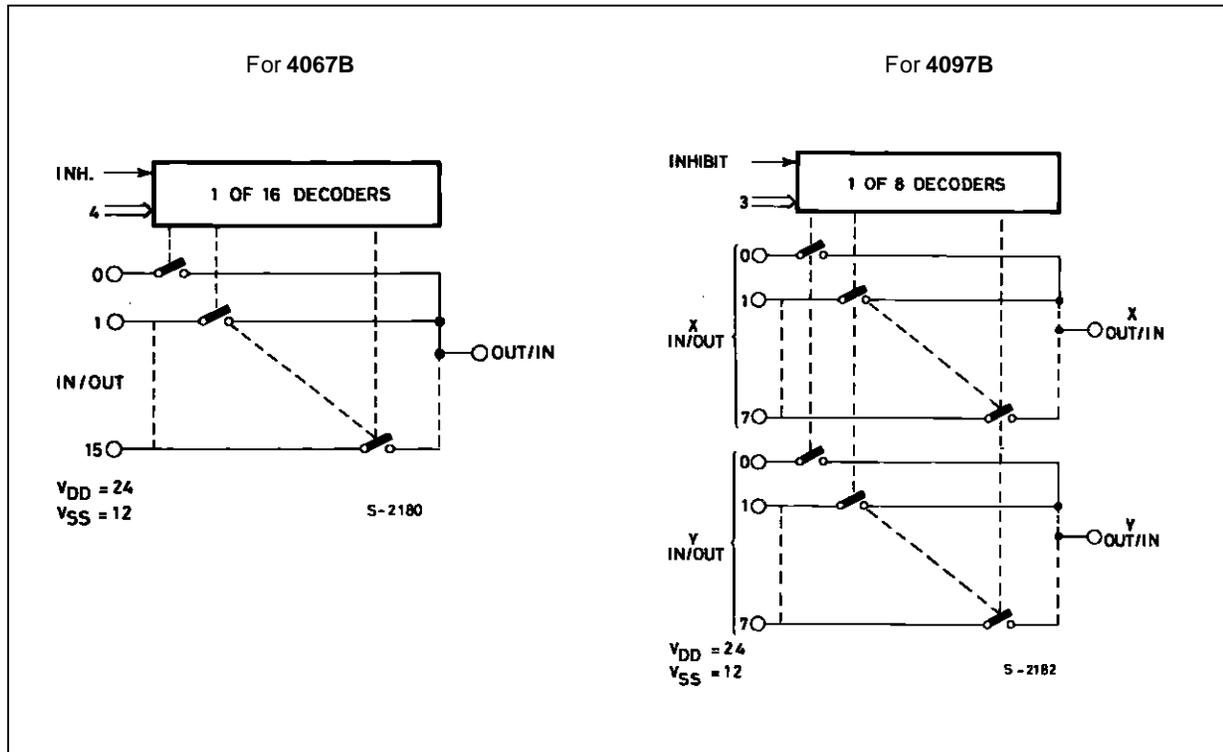

LOGIC DIAGRAM

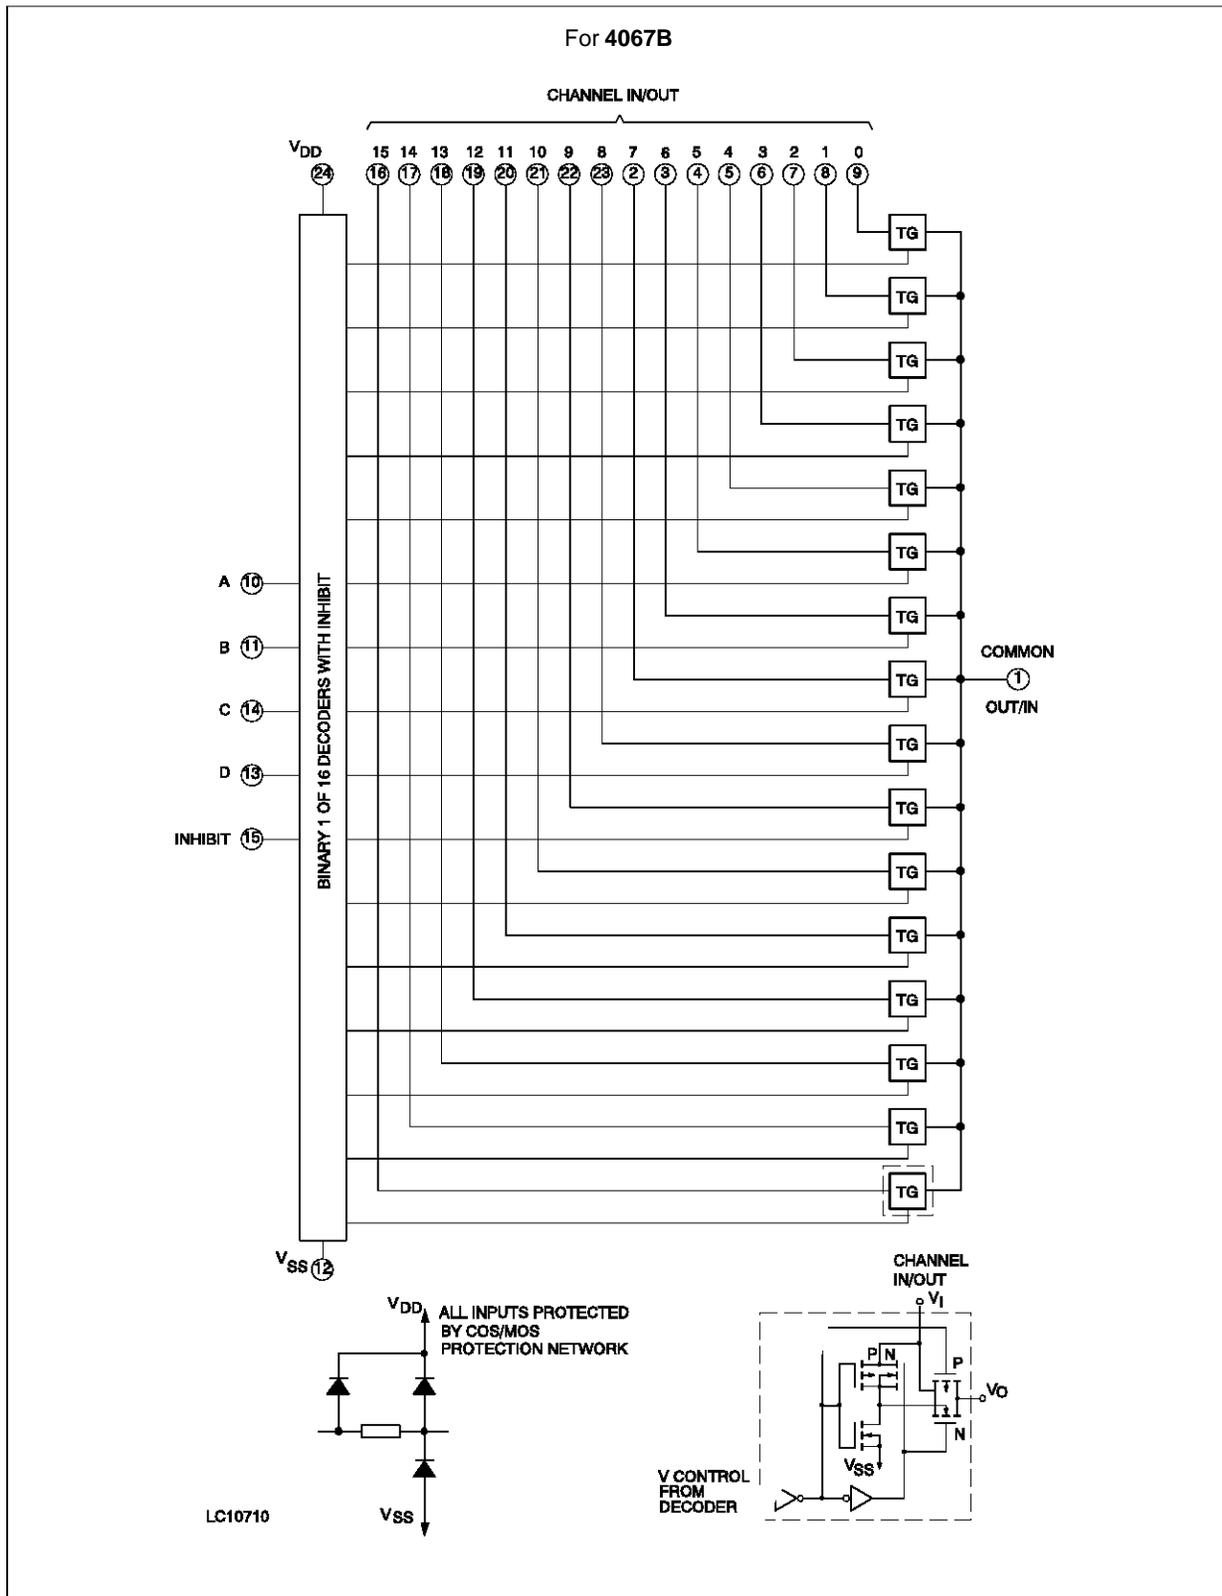

LOGIC DIAGRAM

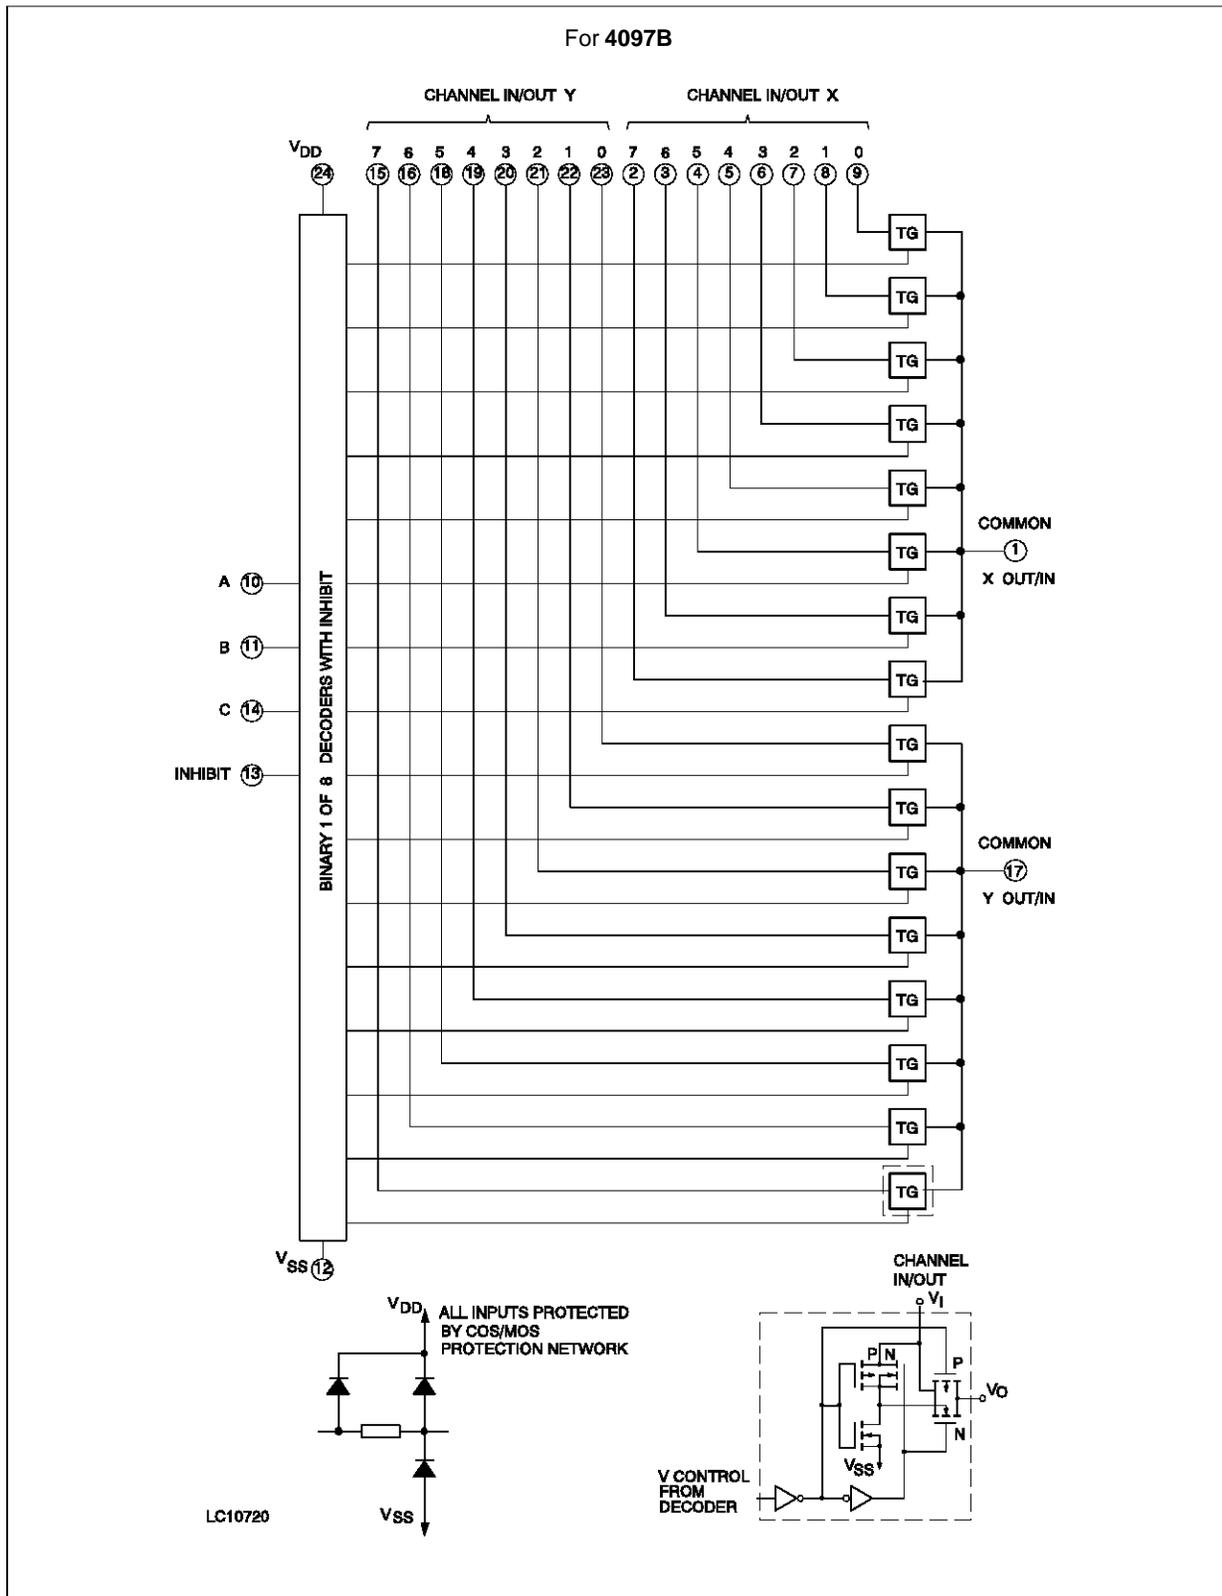

TRUTH TABLES FOR HCC/HCF4067B

A	B	C	D	INH	SELECTED CHANNEL
X	X	X	X	1	None
0	0	0	0	0	0
1	0	0	0	0	1
0	1	0	0	0	2
1	1	0	0	0	3
0	0	1	0	0	4
1	0	1	0	0	5
0	1	1	0	0	6
1	1	1	0	0	7
0	0	0	1	0	8
1	0	0	1	0	9
0	1	0	1	0	10
1	1	0	1	0	11
0	0	1	1	0	12
1	0	1	1	0	13
0	1	1	1	0	14
1	1	1	1	0	15

TRUTH TABLE FOR HCC/HCF4097B

A	B	C	INH	SELECTED CHANNEL
X	X	X	1	None
0	0	0	0	0X 0Y
1	0	0	0	1X 1Y
0	1	0	0	2X 2Y
1	1	0	0	3X 3Y
0	0	1	0	4X 4Y
1	0	1	0	5X 5Y
0	1	1	0	6X 6Y
1	1	1	0	7X 7Y

ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Unit
V _{DD} *	Supply Voltage:	-0.5 to +20	V
V _I	Input Voltage	-0.5 to V _{DD} + 0.5	V
I _I	DC Input Current (any one input)	± 10	mA
P _{tot}	Total Power Dissipation (per package)	200	mW
	Dissipation per Output Transistor for Top = Full Package Temperature Range	100	mW
T _{op}	Operating Temperature:	-55 to +125	°C
T _{stg}	Storage Temperature	-65 to +150	°C

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

* All voltage values are referred to V_{SS} pin voltage.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V _{DD}	Supply Voltage:	3 to 18	V
V _I	Input Voltage	0 to V _{DD}	V
T _{op}	Operating Temperature:	-55 to +125	°C

STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)

Symbol	Parameter		Test Conditions				Value						Unit				
			V _{IS} (V)	V _{EE} (V)	V _{SS} (V)	V _{DD} (V)	T _{LOW} *		25 °C			T _{HIGH} *					
							Min.	Max.	Min.	Typ.	Max.	Min.		Max.			
I _L	Quiescent Supply Current					5		5		0.04	5		150	μA			
						10		10		0.04	10		300				
						15		20		0.04	20		600				
						18		100		0.08	100		3000				
SWITCH																	
R _{ON}	On Resistance	HCC types	0 ≤ V _I ≤ V _{DD}	0	0	5		800		470	1050		1300	Ω			
						10		310		180	400		580				
						15		200		125	240		320				
ΔON	Resistance ΔR _{ON} (Between any two channels)			0	0	5				10			Ω				
						10				10							
						15				5							
OFF (●) Channel Leakage Current	Any Channel OFF			0	0	18		100		±0.1	100		1000	μA			
						All Channel OFF (common OUT/IN)	0	0	18		100		±0.1		100		1000
C	Capacitance Input Output for 4067 Output for 4097 Feedthrough				-5	5				5				pF			
										55							
										35							
										0.2							
CONTROL																	
V _{IL}	Input Low Voltage		= V _{DD} thru 1KΩ	V _{EE} =V _{SS} R _L = 1KΩ to V _{SS} I _{IS} < 2μA (on all OFF channels)		5		1.5			1.5		1.5	V			
						10		3			3		3				
						15		4			4		4				
V _{IH}	Input High Voltage					5	3.5		3.5			3.5	V				
						10	7		7			7					
						15	11		11			11					
I _{IH} I _{IL}	Input Leakage Current		V _I = 0/18V			18		±0.1		±10 ⁻³	±0.1		±1	μA			
C _I	Input Capacitance		Any Address or Inhibit Input							5	7.5			pF			